


Tideland offers a variety of tool kits for minor repairs that may be ordered separately to assist in preserving buoys.



The service hatch provides easy entry to energy cells. The battery section will hold one or two energy cells depending on power requirements. The entire power system is above the waterline and designed to avoid corrosion, vibration and battery spillage.

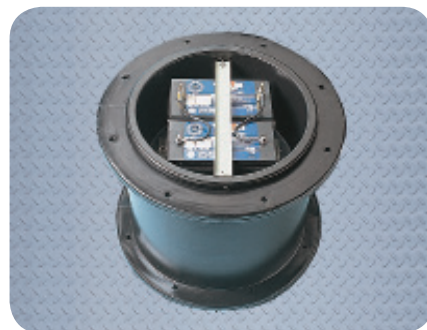

Tideland Signal Corporation
(USA)
us-sales@tidelandsignal.com

Tideland Signal Ltd
(Canada)
canada-sales@tidelandsignal.com

Tideland Signal Ltd
(Burgess Hill, UK)
emea-sales@tidelandsignal.com

Tideland Signal
(The Netherlands)
emea-sales@tidelandsignal.com

Tideland Signal Ltd
(Dubai, UAE)
emea-sales@tidelandsignal.com

Tideland Signal Pte Ltd
(Singapore)
asia-sales@tidelandsignal.com

Tideland Signal Pte Ltd
(Tianjin, China)
asia-sales@tidelandsignal.com



SB-138P

SENTINEL® BUOY



The SB-138P Sentinel® buoy is a product of Tideland Signal's continued commitment in developing new higher performance, low maintenance, cost effective marine aids to navigation. Deployed in over 40 countries, the SB-138P buoy utilises the benefits of the latest in materials, manufacturing processes and technology. Providing a rugged, lightweight buoy with exceptional station-keeping and long life, while reducing the long term maintenance expense typically associated with floating aids to navigation.

FEATURES

UV-STABILISED POLYETHYLENE - Rotationally moulded to form a seamless body, 9.5mm thick. Through a unique mould design and a controlled process, an increased thickness is formed at major stress points.

DIVIDED INTO THREE SECTIONS - A float section, battery section and a nav-aid section form an abrasion resistant, shock absorbing buoy able to withstand knocks and/or collisions. The float section has a moulded in slip resistant surface, providing an added safety precaution for on station maintenance.

MATCHING OR ALTERNATING SECTIONS - Easily makes bifurcation buoys, either red or green as required. Cardinal buoys can be assembled using the same method, with yellow and black sections. Fairway or Safe Water buoys are produced using a process of moulded in colour graphics, resulting in red and white vertical striping.

LONG-TERM STRENGTH AND SECURITY - The float section is internally cross-braced with stainless steel rods that are connected to stainless steel bushings in mooring and lifting eyes. Mooring eyes are fitted with a replaceable stainless steel wear bushing.

STABILITY - Achieved by filling float section with a calculated amount of reinforced concrete as ballast. Then the entire float section is filled with polystyrene beads. The float is then sealed and placed into a steam-chest to expand the foam beads to maximum size, fusing the beads together. This process results in one solid piece of polystyrene completely filling all voids, preventing water ingress in the event of puncture, adding ruggedness to an already tough floating aid.

POWER- Configured for 12V or 24V nominal, the power system for the lantern and optional equipment is housed in the battery section, which also forms part of the tower for the lantern.

NAVAID SECTION - Has provision for four 10 peak watt solar modules or up to three 20 peak and one ten peak watt solar modules. Configurations of solar modules can vary depending on electrical load and average insolation for area of deployment. This section also includes an internal high gain passive reflector (10m²) and lantern guard (if needed). Access to battery section and all equipment is through a hinged, tamper resistant, watertight service hatch, located in the navaid section.



Technical Details

Construction	Rotationally moulded in medium density UV-stabilised virgin polyethylene, 9.5mm thick
Foam Filling	16kg/m ³ expanded polystyrene foam
Air Weight	1000lb (454kg) (including two 38mm (1-1/2in) shackles)
Diameter	5ft 9in (1750mm)
Focal Plane Height	7ft 6in (2290mm)
Optional Extended Focal Plane	9ft 6in (2900mm)
Draft	2ft 6in (751mm)
Freeboard	1ft (305mm)
Submergence	138lb/in (24.7kg/cm)
Radar Reflector	10m ² (X-band)
Radar Range, nominal	3 to 4NM
Visual Area with daymark panels (can shape)	17.2ft ² (1.6m ²)
Visual Area with daymark panels (nun shape)	16.1ft ² (1.5m ²)
Surface Colour	As Specified
Maximum Mooring Load	1400lb (636kg)
Maximum Current	6 knots

Recommend Moorings

Current less than 2 knots

Water Depth (ft)	Chain Length (Shot)	Chain size
35	45ft (1/2)	1 1/8 in
35-50	90ft (1)	1 in
50-80	135ft (1 1/2)	1 in
80-120	180ft (2)	3/4 in
120-160	225ft (2 1/2)	5/8 in
160-200	315ft (3 1/2)	1/2 in

Current 2-4 knots

Water Depth (ft)	Chain Length (Shot)	Chain size
35	90ft (1)	1 1/8 in
35-50	90ft (1)	1 in
50-80	135ft (1 1/2)	1 in
80-120	225ft (2 1/2)	3/4 in
120-160	450ft (5)	5/8 in
160-200	450ft (5)	1/2 in

Current 4-6 knots

Water Depth (ft)	Chain Length (Shot)	Chain size
35	90ft (1)	1 1/8 in
35-50	135ft (1 1/2)	1 in
50-80	180ft (2)	1 in
80-120	270ft (3)	3/4 in
120-160		
160-200		