

INFORMER  
V-20

# V-Track™

V-20 INFORMER™

**The V-Track™ V-20 Informer™ is an AIS information provider and remote monitoring system for use on marine aids to navigation (AtoN) and other structures. The V-20 Informer™ is available in two options: "Type 1" is a transmit only device, and "Type 3" is a transmit and receive device that can be configured over the air and has chaining functionality. For most applications a transmit only device provides the ideal AIS AtoN solution.**

The V-20 Informer™ is a compact unit housed in a rugged environmental enclosure for use on any AtoN. With a power consumption of less than 0.09Ah/day for a Type 1, the V-20 Informer™ is suitable for solar installations, including buoys anywhere in the world. Tideland Signal has adopted the emerging IEC standards defining the functions and message structure contained within the AIS AtoN message. The V-20 Informer™ complies with IEC and ITU requirements and also IALA recommendations. It has the following approvals: Industry Canada, R&TTE, BSH, FCC.

In addition, both the Type 1 and Type 3 V-20 Informer™ have optional remote monitoring capabilities. It is capable of remote monitoring almost any manufacturer AtoN. When monitoring a Tideland Signal lantern the standard system provides lantern status, battery voltage (loaded and unloaded) and an extra available input. The V-20 Informer™ broadcasts AtoN message 21 and also has the capability of broadcasting meteorological, hydrological and remote monitoring data.

## Characteristics

- **VIRTUAL AND SYNTHETIC - AtoN** There are situations that require the authorities in charge to create either virtual or synthetic aids to navigation using their existing AIS infrastructure. For these cases, the V-20 Informer™ is ideal as it supports both virtual and synthetic AtoN.
- **PROGRAMMING SOFTWARE** - The V-20 Informer™ is supplied with a comprehensive software application that enables the user to program the unit via an optional USB interface.



**TIDELAND**  
a xylem brand


# V-TRACK™

## Technical Details

<b>IP Rating</b>	IPx6 and IPx7
<b>Designation</b>	Automatic Identification System (AIS) for AtoN
<b>Power Supply</b> Type 1 Power Consumption Type 3 Power Consumption	12VDC nominal from 0.09Ah/day* 0.8Ah/day* * At 12.5W, reporting interval 3 minutes
<b>Temperature Range</b>	-25° C to +55° C
<b>Message 21 Content</b>	MMSI Number, Name of AtoN, Position, Position Accuracy, RAIM Indicator Type of Position Fixing Device, Time Stamp, Dimension of AtoN, Type of AtoN Virtual AtoN Target Flag, 8 bits reserved for regional application
<b>Transmitter Performance</b> TX Frequency Range Frequency Accuracy Data Rate TX Power Control Receiver Performance (Type 3 Only) RX Frequency Range Sensitivity Standard Compliance	156.025MHz to 162.025MHz in 25kHz steps ±500Hz 9,600 bps 2/5/12.5W (programmable) 156.025MHz to 162.025MHz in 25kHz steps -110dBm @ 20% PER IEC 60945 Ed. 4, IEC 61162-1/2 Ed. 2, IEC 62320-2 Ed. 1 IEC 61108-1, ITU-R M. 1371-4, IALA A-126 Ed. 1.4
<b>Optional Sensor Board</b>	5- Isolated digital inputs 2 - Isolated analogue inputs 3 - Non isolated digital inputs 2 - Relay drive outputs 1 - Current sensor up to 5A 1 - IEC61162 -1 PORT AT 38400 baud 2 - RS232 ports SDI-12 interface
<b>Interface</b>	USB for configuration 2 - IEC61162-1 Ports at 38400 baud
<b>Physical</b> Diameter With Bird Spikes (optional) Weight	235mm high x 188mm 452mm high x 188mm 1.2kg

NOTE: Specifications are subject to change.

## V-20 Informer™ With Enclosed GPS

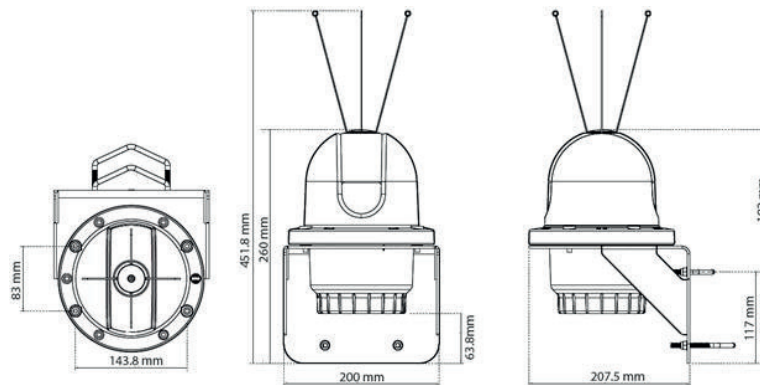

Tideland Signal Corporation  
(USA)  
us-sales@tidelandsignal.com

Tideland Signal Ltd  
(Canada)  
canada-sales@tidelandsignal.com

Tideland Signal Ltd  
(Burgess Hill, UK)  
emea-sales@tidelandsignal.com

Tideland Signal  
(The Netherlands)  
emea-sales@tidelandsignal.com

Tideland Signal Ltd  
(Dubai, UAE)  
emea-sales@tidelandsignal.com

Tideland Signal Pte Ltd  
(Singapore)  
asia-sales@tidelandsignal.com

Tideland Signal Pte Ltd  
(Tianjin, China)  
asia-sales@tidelandsignal.com

[www.tidelandsignal.com](http://www.tidelandsignal.com)