

RLED-355

LED Range Lantern with MasterRange



TIDELAND ENGINEERED

Tideland's original RL-355 range lantern was developed for the US Coast Guard as a high intensity range lantern and has earned its spot as our most popular range lantern.

Our new development, RLED-355, is an LED version of the original lantern. Featuring MasterRange, RLED-355 provides exceptional performance over traditional incandescent lamps.

MasterRange is a versatile LED light panel that is used to upgrade RL-355 from existing incandescent lamp technology.

This new assembly not only eliminates traditional lampchangers, it also eliminates costly mirrors and does not require focusing.

MasterRange is available with multiple numbers of LEDs, from 2 to 15, allowing for a wide range of effective intensities, with ranges up to 24Nm.

RETROFITTING

RLED-355 is available complete or alternatively MasterRange is available as a conversion kit that can be retrofitted to existing RL-355s.

All control electronics, LEDs, LED drivers, LED lenses (not external spreader lenses), flashers, daylight control circuitry and mounting hardware are included in the conversion kit.

MasterRange LED panels are available in a range of assembly sizes and can be retrofitted to similar lanterns manufactured by companies other than Tideland Signal.




RLED-355 range lantern shown here fitted with spreader lens, MR-15 and optional hood

OPTIONAL EQUIPMENT

- Optional hood assembly helps keep lens clear of dirt and bird droppings
- Optional Tideland GPS based system, to maintain flash synchronisation of two or more range lanterns
- Optional dual power supply for MasterRange MR-2, 4, 6, 8 and 10 lens (standard on MR-12 and 15).

FEATURES

- Supports all marine signaling industry standards
- Utilises 1/4 inch thick transparent acrylic lens
- Spreader lenses are available for varied horizontal divergences
- Constructed of corrosion resistant, marine grade materials
- Reliable in the severest of environments
- All IALA approved colours are available
- Easy horizontal aiming and adjustment
- External sunswitch
- Full monitor and control access

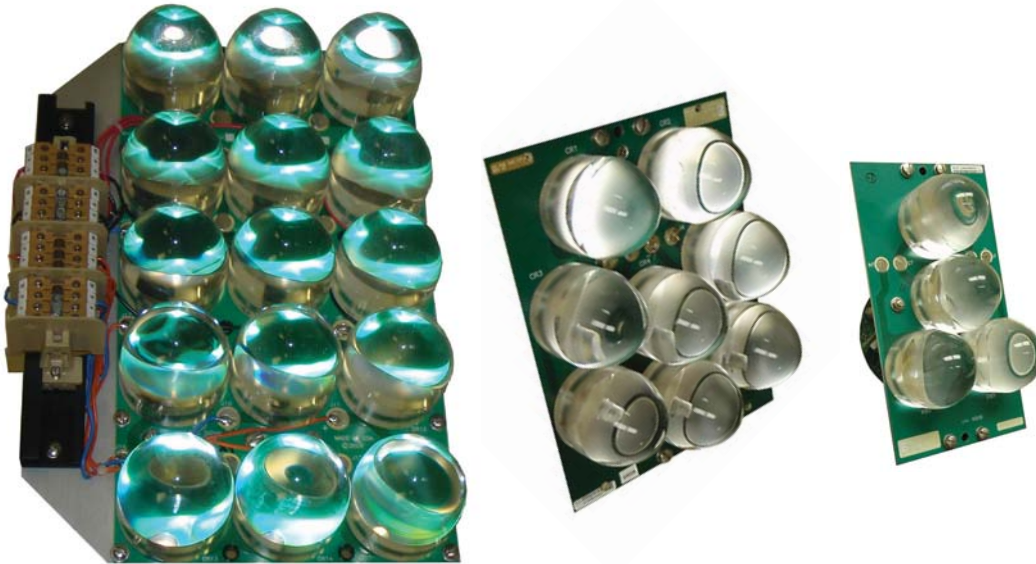

Shown here is MasterRange in MR-15, MR-8 and MR-4 lens panel arrangements

TIDELAND SIGNAL CORPORATION
CORPORATE HEADQUARTERS (Houston, TX)
 TEL + 1 713-681-6101
 FAX + 1 713-681-6233
 EMAIL hq@tidelandsignal.com

TIDELAND SIGNAL CORPORATION (Lafayette, LA)
 TEL + 1 337-269-9113
 FAX + 1 337-269-9052
 EMAIL lafayettesales@tidelandsignal.com

TIDELAND SIGNAL CANADA LTD
(Vancouver and Ottawa)
 TEL + 1 604-247-0988
 FAX + 1 604-247-0987
 EMAIL canada-sales@tidelandsignal.com


TIDELAND SIGNAL PTE LTD (Singapore)
 TEL + 65 6333-0078
 FAX + 65 6333-0079
 EMAIL sales@tidelandsignal.com.sg

TIDELAND SIGNAL LTD (Burgess Hill, UK)
 TEL + 44 (0) 1444 872240
 FAX + 44 (0) 1444 872241
 EMAIL sales@tidelandsignal.ltd.uk

TIDELAND SIGNAL LTD (Dubai, UAE)
 TEL + 971 (0) 4-885-5842
 FAX + 971 (0) 4-885-7352
 EMAIL sales@tidelandsignal.ltd.uk

WEBSITE www.tidelandsignal.com

DIMENSIONS AND MOUNTING PATTERN

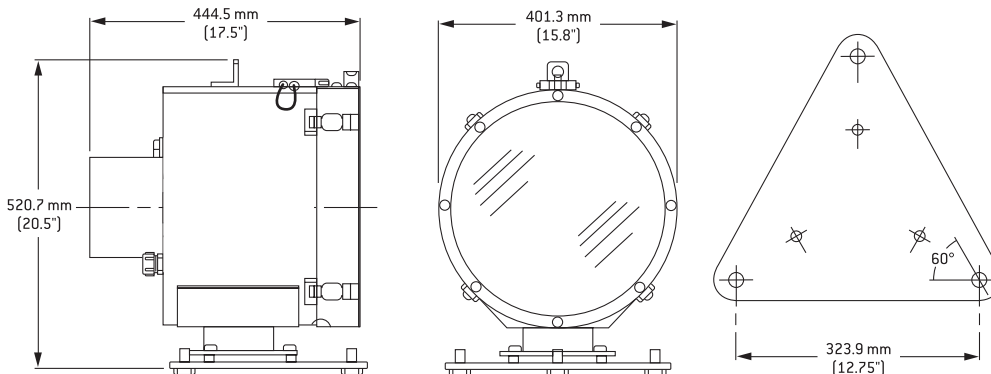

SPECIFICATIONS

Applications	Leading light, short or long range; port traffic signal, night or day
Input Voltage	9 to 36VDC
Input Power	2 to 45W (depending on colour and number of LEDs)
Vertical Divergence	2 to 3.5° (depending on colour)
Horizontal Beam Spreaders	3°, 8°, 11°, 20° or 28°
Mounting	Built-in leveling hardware and rotational slip-ring mounting (3 bolt)
Height	520.7mm (20.5")
Weight with MR-15	19.2kg (42.3lb)
Light Colour	White, green, red, blue or yellow

Note: Specifications are subject to change



ISO 9001:2008
 Certificate
 Number: 30061

ISO 9001:2008

Tideland Signal Corporation maintains ISO 9001:2008 accreditation. It is company policy to provide products and services that meet the highest standards of quality in the industry.

Membership Organisations

